
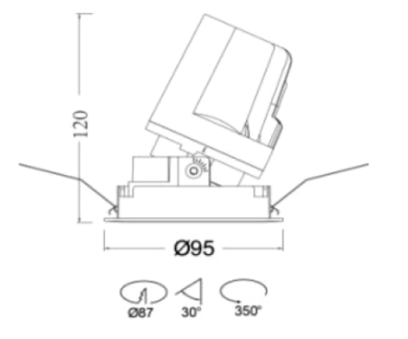


| PROJECT | | TECHNICAL INFORMATION | |
|---------------|--|-----------------------|---|
| LIGHTING CODE | | CONNECTED LOAD (W) | 12W |
| MODEL | ARROVO MINI BEAM | LUMEN OUTPUT (lm) | 960lm |
| DESCRIPTION | Recessed adjustable downlight. Material made of powder coated die cast aluminum housing and trim, anodized aluminum specular silver reflector. Complete with remote electronic LED Driver. | LUMINOUS EFFICACY | 80lm/w |
| ORIGIN | Asia | COLOR TEMPERATURE | <input type="radio"/> 3000K <input type="radio"/> 4000K |
| FINISHES | <input checked="" type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Aluminium | COLOR RENDERING INDEX | 80 |
| LOCATION | | BEAM ANGLE | 36Degree |
| | | DIMENSION (L) | Ø 95mm |
| | | (W) | |
| | | (H) | 120mm |
| | | DRIVER | <input checked="" type="checkbox"/> REMOTE |
| | | | <input type="checkbox"/> INTEGRATED |
| | | | <input type="checkbox"/> DALI |
| | | | <input type="checkbox"/> 1-10 V |
| | | | <input checked="" type="checkbox"/> ON-OFF |
| | | | <input type="checkbox"/> ES LAMP |

ILLUSTRATIONS



|  |  | <table border="1"> <thead> <tr> <th>lux</th> <th>m</th> </tr> </thead> <tbody> <tr> <td>1259lx</td> <td>1</td> </tr> <tr> <td>314.8lx</td> <td>2</td> </tr> <tr> <td>139.9lx</td> <td>3</td> </tr> <tr> <td>78.70lx</td> <td>4</td> </tr> <tr> <td>50.37lx</td> <td>5</td> </tr> </tbody> </table> | lux | m | 1259lx | 1 | 314.8lx | 2 | 139.9lx | 3 | 78.70lx | 4 | 50.37lx | 5 |
|---|---|--|-----|---|--------|---|---------|---|---------|---|---------|---|---------|---|
| lux | m | | | | | | | | | | | | | |
| 1259lx | 1 | | | | | | | | | | | | | |
| 314.8lx | 2 | | | | | | | | | | | | | |
| 139.9lx | 3 | | | | | | | | | | | | | |
| 78.70lx | 4 | | | | | | | | | | | | | |
| 50.37lx | 5 | | | | | | | | | | | | | |