




PROJECT	TECHNICAL INFORMATION	
LIGHTING CODE	CONNECTED LOAD (W) 20W	
MODEL	LUMEN OUTPUT (lm) 1600lm	
DESCRIPTION	LUMINOUS EFFICACY 80lm/w	
	COLOR TEMPERATURE <input type="radio"/> 3000K <input type="radio"/> 4000K	
	COLOR RENDERING INDEX 80	
	BEAM ANGLE	
ORIGIN	DIMENSION (L) Ø 95mm Cutout:	
	(W) 120mm	
FINISHES	(H) 80mm	
	DRIVER <input checked="" type="checkbox"/> REMOTE	
LOCATION	<input type="checkbox"/> INTEGRATED	
	<input type="checkbox"/> DALI	
	<input type="checkbox"/> 1-10 V	
	<input checked="" type="checkbox"/> ON-OFF	
	<input type="checkbox"/> ES LAMP	
	Asia	
	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Aluminum	
	Recessed mounted LED downlight. Material made of powder coated extruded aluminium housing, aluminium silver reflector with frosted diffuser. Complete with electronic LED LED driver.	


ILLUSTRATIONS








D140mm

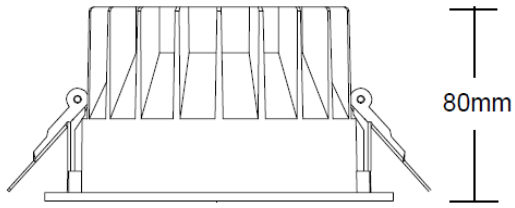

80mm

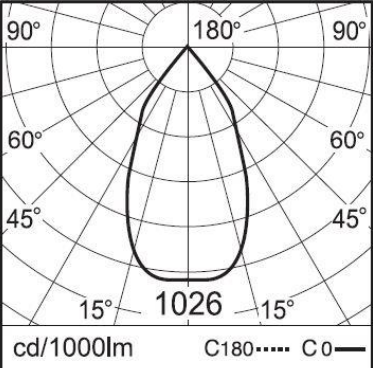

90° 180° 90°
60° 60°
45° 45°
15° 1026 15°
cd/1000lm C180..... C0—